

Machines

Machine	TASKI swingo XP
Subassembly	Electronic

New Firmware Version 3.41

The firmware update V3.41 adds the battery type selection to the electronic.

Selection of battery types

The new firmware V3.41 in combination with the latest released service tool V6.04 (separate newsletter) offers the possibility to choose between 4 different battery types.

- GEL
- Wet
- AGM (Discover)
- XFC (Energys)

⚠ CAUTION


The above listed battery types have different switch-off levels. If the battery type is not corresponding with the adjusted switch-off level of the machine then the battery will be killed within a short period of time.

In case of uncertainty with regard to the correct choice of battery/switch-off level we recommend to liaise either with your battery supplier or with the GTS team.

All spare part electronics delivered ex Münchwilen will be delivered with the "GEL battery" settings (**same setting as up to date**).

If in a service case another battery type than a GEL battery will be built in, then the electronic has to be configured accordingly.

With immediate effect all electronics will be tagged with a sticker, which is describing the 4 battery types. The sticker is meant for a visible determination of the adjusted battery type in case of service updates.

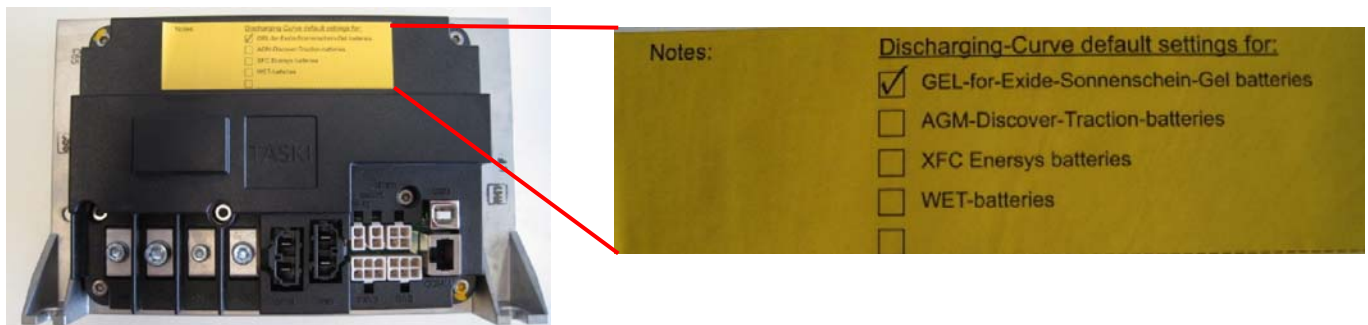

Example: Electronic of TASKI swingo 755 with yellow battery indication sticker.

GTS Newsletter

2012 / 32E

Service Information

- | | |
|--|---|
| ☐ Check parts on stock | ☐ Return defective parts to Münchwilen |
| ☐ Proactive exchange recommended | ☒ NO proactive exchange recommended |
| ☒ Modification is backwards compatible | ☐ Modification is NOT backwards compatible |
| ☐ Update/modify machines in the field | ☐ Entitled to warranty |
| ☐ Dispose/recycle defective parts | ☒ Parts are available ex stock Münchwilen |
| ☒ Others | |

The selection of the battery parameter can only be carried out with the new Service Tool V6.04.

⚠ CAUTION

It has to be paid attention that during the downloading process the connection between the machine and the laptop is not getting interrupted. In case this happens the electronic has to be exchanged.

Production

TASKI swingo XP

as of machine number 7028