



## Viewing and Changing the Delta-Q Profile


Power on the Delta-Q charger by connecting it to wall power.

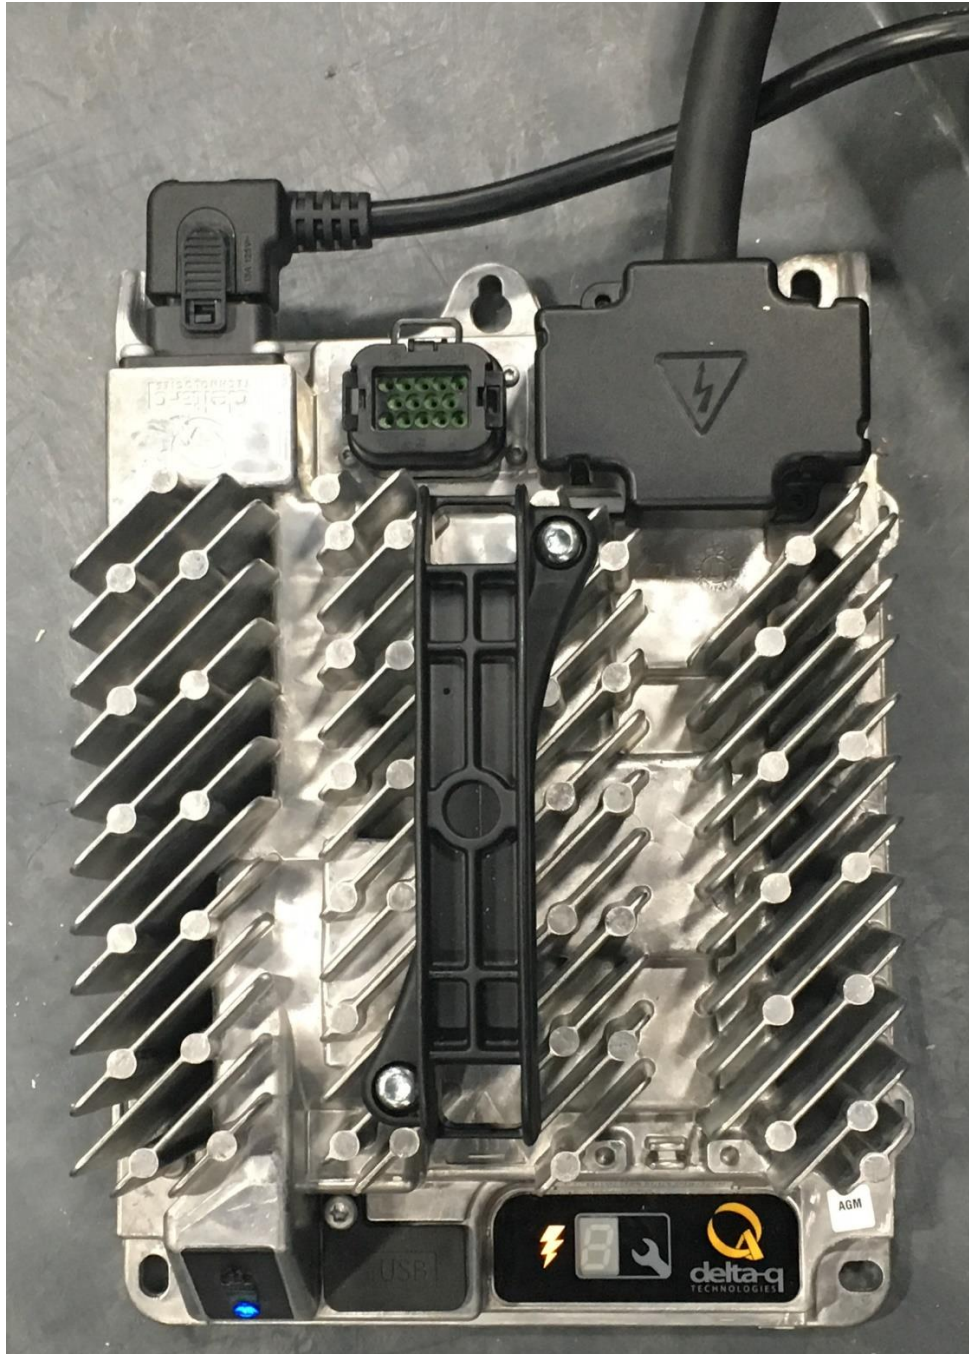

Push the wrench icon on the front screen to view the current charging profile.

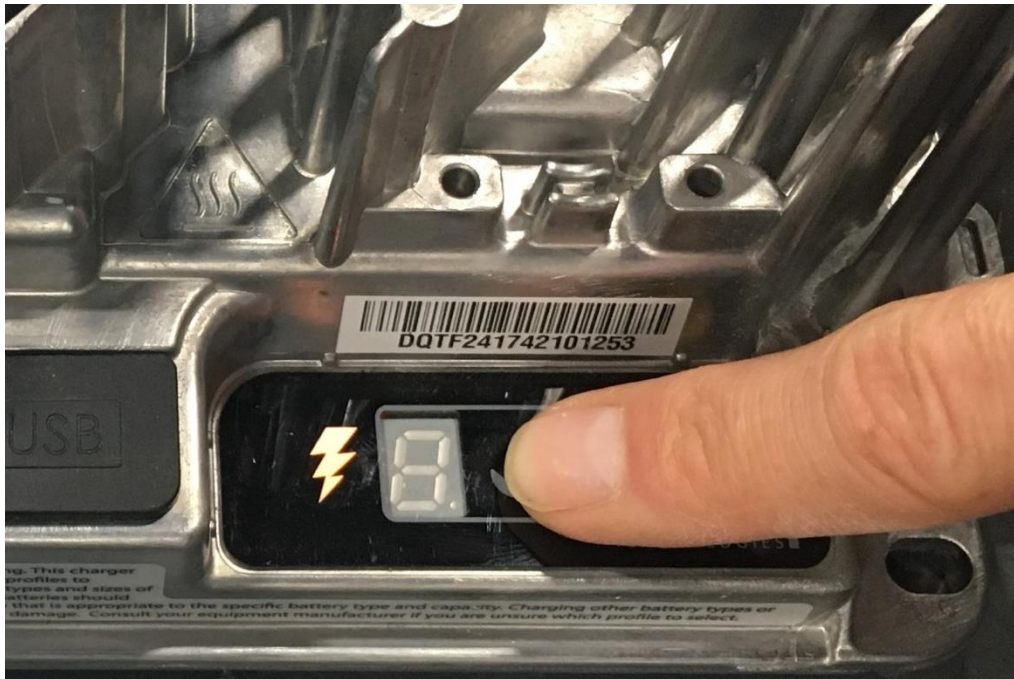

The current charge profile will blink P-#-#-#

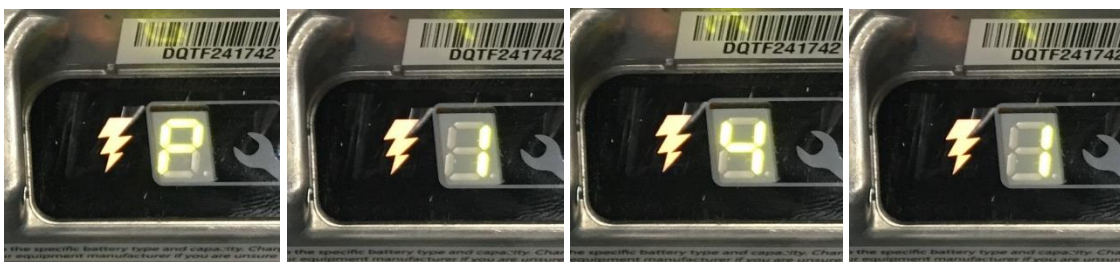

The charging profile should reflect the existing battery type. If needed, it can be changed by following the procedure below.

## Selecting A Charge Profile

1. Disconnect AC input from the charger, or from the wall outlet. Wait 30 seconds for the input relay to open.



Figure 1:  
Disconnect AC  
input from the  
charger.

2. While reconnecting AC input, press and hold the Select Charge Profile Button. Hold the button until Error Indicator is on and Battery Charging Indicator starts flashing.



Figure 2:  
Reconnect AC  
input while  
holding the  
Select Charge  
Profile Button.

3. Press and release the Select Charge Profile Button to advance through charging profiles loaded on the charger. The selected charging profile will be displayed up to three times (e.g. "P-0-1-1" for Profile 11).\*



Figure 3:  
Press the  
Select Charge  
Profile Button  
to advance  
through  
the charge  
profiles. Hold  
the button for  
10 seconds to  
confirm your  
selection.

\*Process will time out and profile will remain unchanged if there is 15 seconds of inactivity, a profile number is allowed to display three times, or if AC power is cycled.

4. Once desired charging profile is displayed, press and hold button for 10 seconds (see Figure 3) to confirm selection and exit Profile Selection Mode.
5. Press the Select Charge Profile Button to check that the desired profile is selected.

Use this table to record the charging profiles on your charger.

Model:	IC650-_____
Serial No.:	DQS_____
Profile No.	Battery Type
141	AGM
7	Wet Lead Acid