



GTS NEWSLETTER


TASKI swingo XP

Subassembly: Upper part

Improved tank cover locking mechanism

With the new improved locking mechanism for the tank cover, an accidental opening is impeded. To open the cover, the locking bow has to be **PULLED** forward.

The locking bow order-no. 4127238 (18602-86) replaces der rubber locking disc and steel disc. The fixation is done with the same screws.

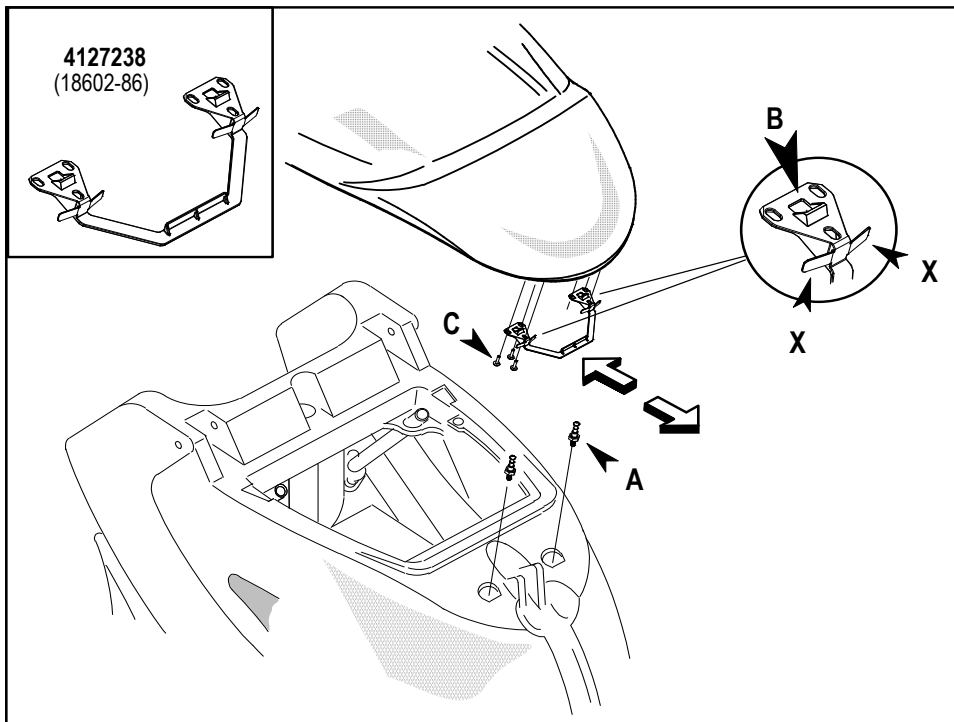

Service

- All machines can be retrofitted with the new locking mechanism

The old parts are not available anymore:

- 4126681 (18601-61) Rubber locking disc
- 4126682 (18601-62) Steel disc

Caution

The screws C should only be tightened as strong that the automatic repositioning of the locking mechanism is ensured.

Production

TASKI swingo XP with new locking mechanism

from machine-no. xxxxxxxxx1539