

Release Date:
February 10, 2023



Technical Service Bulletin

MODEL(S) AFFECTED: **M20 Gas/LP/Diesel (NA serial numbers above 014000) (CE serial numbers above U01500)**
T20 Gas/LP/Diesel (NA serial numbers above 013000) (CE serial numbers above U01400)
M30 Gas/LP/Diesel (NA/CE serial numbers above 010000)

SUBJECT: Optional spray nozzle and high pressure washer displaying a series of fault codes on LCD (liquid crystal display) or screen during normal operation (spray nozzle/high pressure washer fully functional).

PURPOSE: Inform operators/maintenance and service personnel that these fault codes may appear during normal operation and that no further action is required, unless the spray nozzle/high pressure washer are not functioning properly.

NOTES: The following fault codes could possibly appear on the LCD/screen during normal operation:

0x0601 Fault Pump Open

0x0642 Fault Pres Washer Safety (engage parking brake)


0x0641 Fault Pres Washer Enabled

0x0643 Fault Pres Washer Enabled

Further troubleshoot machine if the spray nozzle/high pressure washer are not functioning properly and these and/or other fault codes appear. Contact T.A.C. (Technical Assistance Center) for additional troubleshooting guidance.

Questions, contact the Tennant Customer Service Department at (800) 553-8033/
 TNV contact 0031 (0) 413241242.

Warranty Information: Standard warranty terms apply.

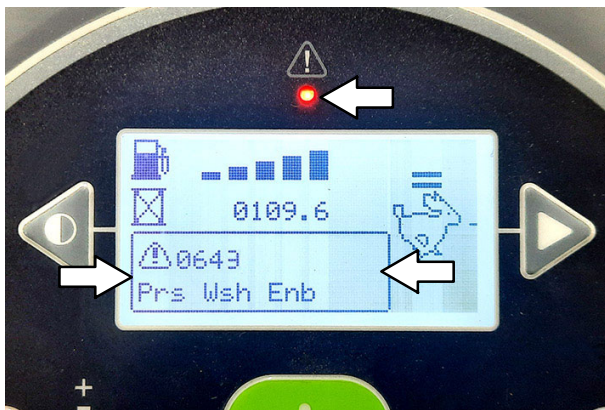

Press flashing red fault indicator button to view faults. A fault/alert screen will appear in display.

