


Replacing the Modem Y Cable


Turn the key to power off the scrubber. Raise the seat and disconnect the red battery coupling.




Use a 2.5 mm hex driver to remove the control panel screws.

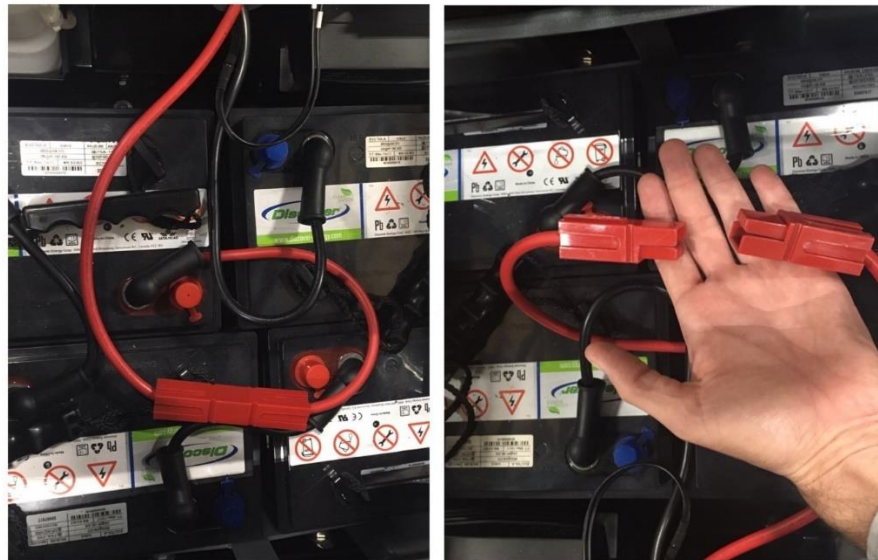

Unplug the power and USB cable as indicated below.

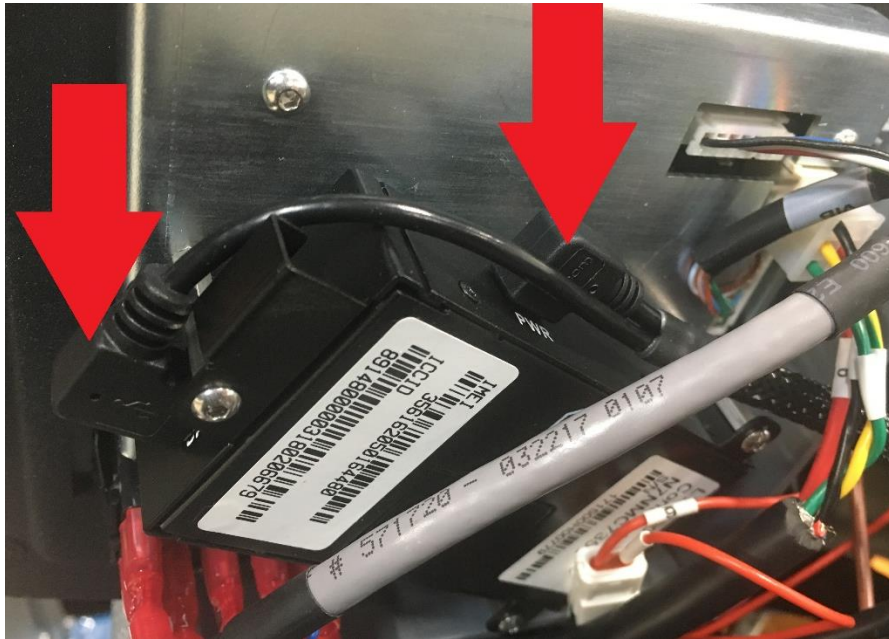


Unplug the LTE Modem connection and replace the cable.

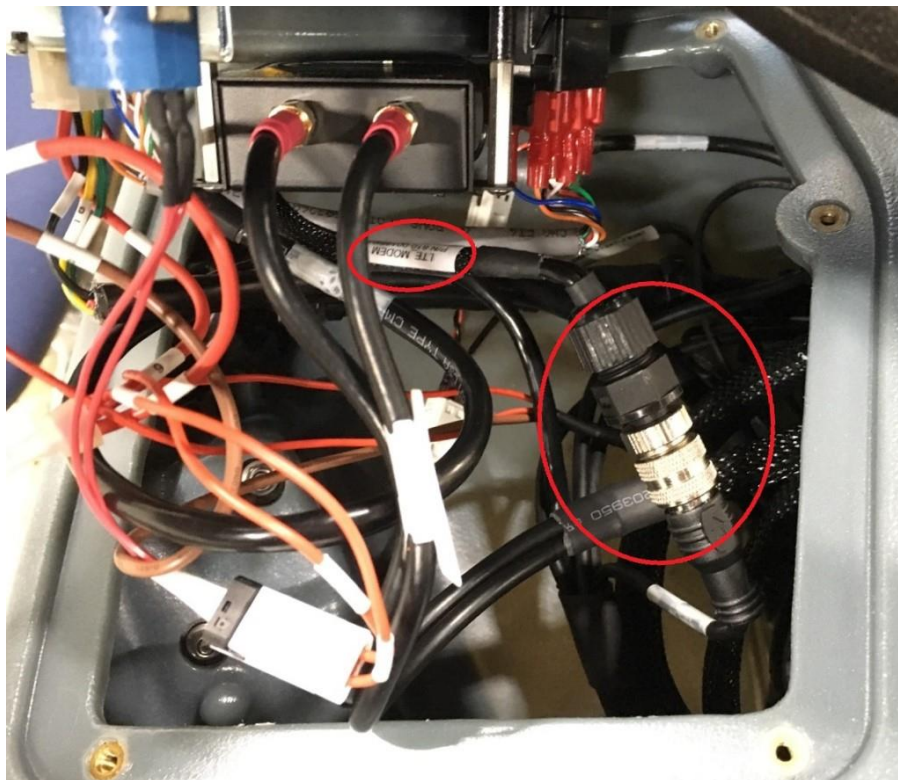



Zip tie the cable in place as shown.

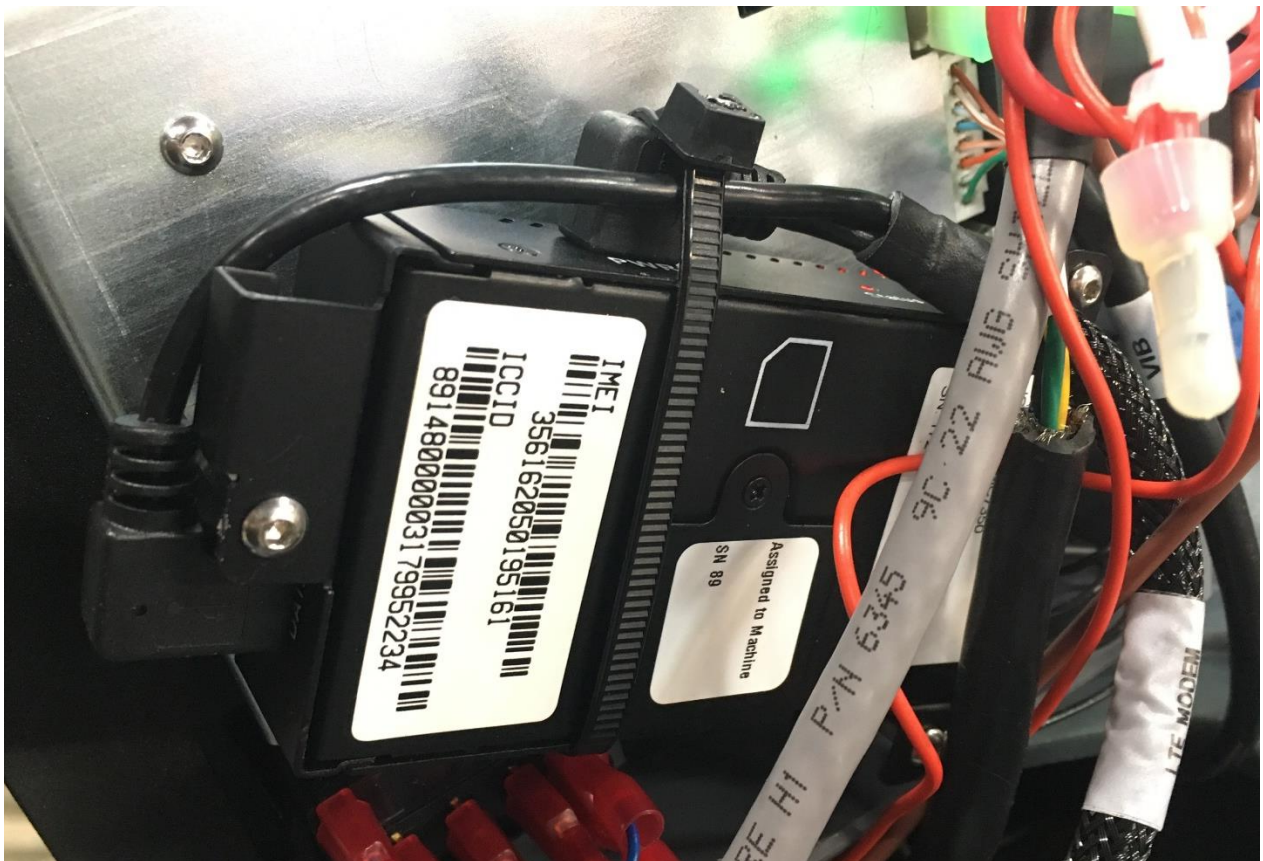

Reconnect the power and USB cables and secure the control panel. Reconnect the red power coupling beneath the seat and turn the key clockwise to power on the machine. After the UI screen is allowed sufficient time to boot, the yellow ROC icon should illuminate, which shows the modem is communicating with the network.

