Module Replacement Kit

Models: T3, T3+, T3e, T5, T5e, T7, T15, T16, 5680, 5700, 7100, 7300, 8300, Speed Scrubs and Speed Scrub Rider


KIT INSTALLATION INSTRUCTIONS:

Installation Time: 1 hour


TOOLS REQUIRED: Phillips Screwdriver, Pliers, Hose Cutter (T3/T3+ Models: 7mm & 10mm Wrench).

1. Drain the solution and recovery tanks.
2. Park machine on a level surface, turn machine off and remove key.
3. Remove the defective *ec-H2O* module from the machine. *NOTE: T3/T3+ Models - The front shroud and recovery tank assembly must be removed to access the module.*
4. Cut the inlet and outlet hoses on the new module as specified below.
5. Adjust the DIP switches on the new module as specified below and install module plug.
6. Install new module and check the machine for proper operation.

Cut Hoses as Specified:

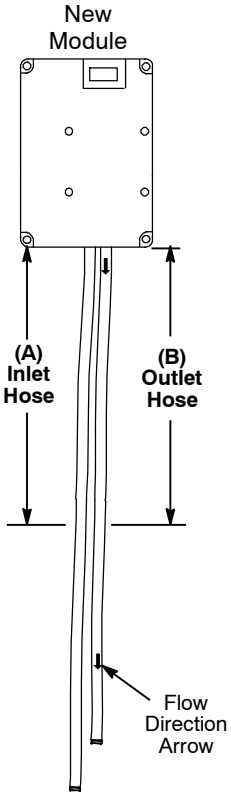

Set DIP Switches

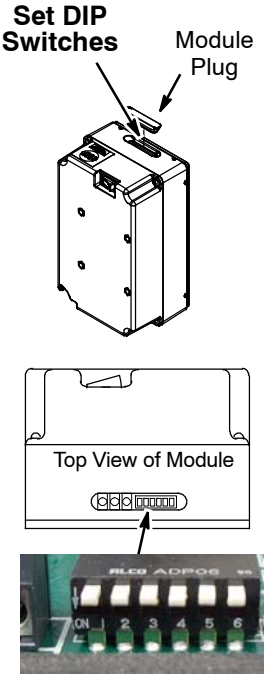

↑ = OFF
↓ = ON
Refer to chart for proper settings

Model		Inlet Hose Length (A)	Outlet Hose Length (B)	DIP Switch Setting*	
				Water Flow Rate	Machine Type
5680/5700 28"/700mm & 32"/800mm Disk		14" 36cm	14" 36cm	↑ ↑	↑ ↑ ↑ ↓
5680/5700 28"/700mm & 32"/800mm Cyl		14" 36cm	14" 36cm	↑ ↓	↑ ↑ ↑ ↓
5680/5700 36"/900mm Disk		14" 36cm	14" 36cm	↑ ↑	↑ ↑ ↑ ↑
5680/5700 36"/900mm Cylindrical		14" 36cm	14" 36cm	↑ ↓	↑ ↑ ↑ ↑
T16 Disk		6.5"/16.5cm	9"/23cm	↑ ↑	↑ ↓ ↓ ↓
7300, 8300		2.25"/5.7cm	5"/13cm	↑ ↓	↑ ↓ ↓ ↓
T16 Cylindrical		6.5"/16.5cm	9"/13cm		
T3	17"/43cm 20"/50cm Disk	12"/30cm	12"/30cm	↑ ↑	↑ ↑ ↓ ↓
T3e/Speed Scrub		63"/160cm	58"/147cm		
T3+	24"/600mm Disk	12"/30cm	12"/30cm	↑ ↑	↓ ↑ ↑ ↑
T3e/Speed Scrub XC		63"/160cm	58"/147cm		
T5	24"/600mm Disk	29"/74cm	29"/74cm	↑ ↑	↑ ↑ ↓ ↑
T5e/Speed Scrub		26"/66cm	26"/66cm		
T5	26"/650mm Cylindrical	29"/74cm	29"/74cm	↑ ↓	↑ ↑ ↓ ↑
T5e/Speed Scrub		26"/66cm	26"/66cm		
T5	28"/700mm 32"/800mm Disk	29"/74cm	29"/74cm	↑ ↑	↑ ↓ ↑ ↑
T5e/Speed Scrub		26"/66cm	26"/66cm		
Speed Scrub (Aldi Stores)	28"/700mm Disk	26"/66cm	26"/66cm	↓ ↑	↑ ↓ ↑ ↑
T5	32"/800mm Cylindrical	29"/74cm	29"/74cm	↑ ↓	↑ ↓ ↑ ↑
T5e/Speed Scrub		26"/66cm	26"/66cm		
T7/Speed Scrub Rider Disk		3"/8cm	3"/8cm	↑ ↑	↑ ↓ ↑ ↓
T7/Speed Scrub Rider Cylindrical		3"/8cm	34"/36cm	↑ ↓	↑ ↓ ↑ ↓
T15 Disk		5"/13cm	5"/13cm	↑ ↑	↑ ↓ ↓ ↑
7100 Disk		9.25"/23.5cm	11.25"/25.5cm		
T15 Cylindrical		5"/13cm	5"/13cm	↑ ↓	↑ ↓ ↓ ↑
7100 Cylindrical		9.25"/23.5cm	11.25"/25.5cm		
DIP Switch Numbers				1 2	3 4 5 6

***** Standard Settings. For optional solution flow rate settings, contact the Customer Service Department.

T5 Model NOTE:
Install hose clamp, supplied with kit, as shown. This will prevent solution hose from kinking.

