

# MAIN BRUSH BELT REPLACEMENT

## Installation Instructions

**Models:** Nobles Scout 24, Tennant 3610

**(Installation Time: 15 Minutes)**

**TOOLS REQUIRED:** 3mm Allen Wrench, 4mm Allen Wrench, 5mm Allen Wrench, 8mm Socket

**Parts List:** 1016275 Belt

1. Remove top cover from machine by removing the four screws.
2. Unplug the Red\Black battery connector.
3. Remove right side cover.
4. Remove the mounting bolt for the side brush arm by using a 5mm Allen wrench. (Figure 1)
6. Loosen (do not remove) the two motor mounting bolts (8mm) and pivot motor counter-clockwise to loosen the belt tension. (Figure 3 & 4)

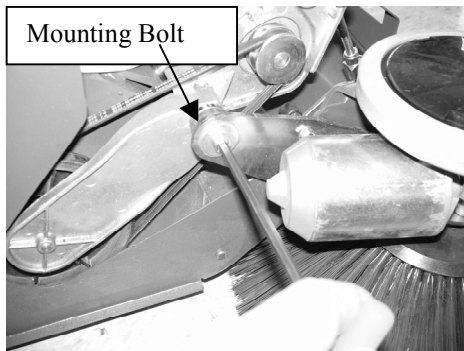


Figure 1

5. Remove side brush arm. (Figure 2)



Figure 2



Figure 3



Figure 4

7. Remove old belt and install new belt onto the pulleys.
8. Tighten belt tension by pivoting the motor clockwise. Tighten the two mounting bolts.
9. Reassemble side brush arm support.
10. Reassemble covers and reconnect the battery.
11. Test for proper operation.