


Inspecting the Solenoid Valve Connections



Power on the machine, press the one touch button, followed by the vacuum button, to lower the scrub deck and turn off the vacuum. Power off the machine.



Remove the right side squeegee and right side brush. The arrow indicates where the solenoid is located beneath the scrubber.

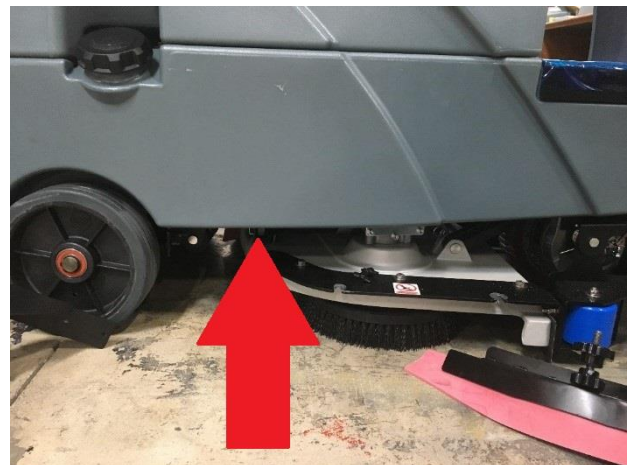

Make sure the two wires are connected to the solenoid , as shown below. Give a gentle tug where the wire meets the strain relief to make sure the wires haven't become worn or loose.

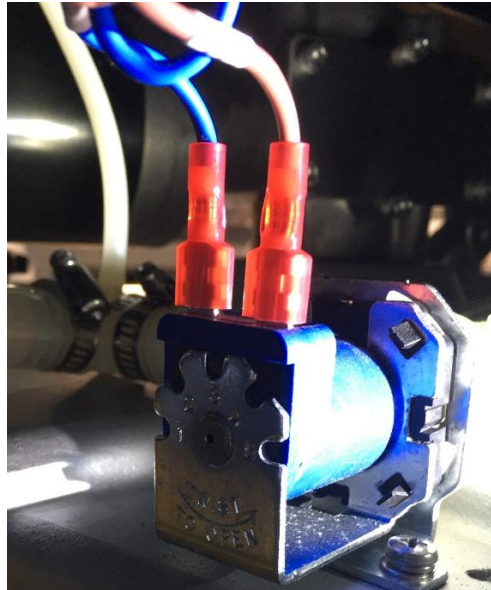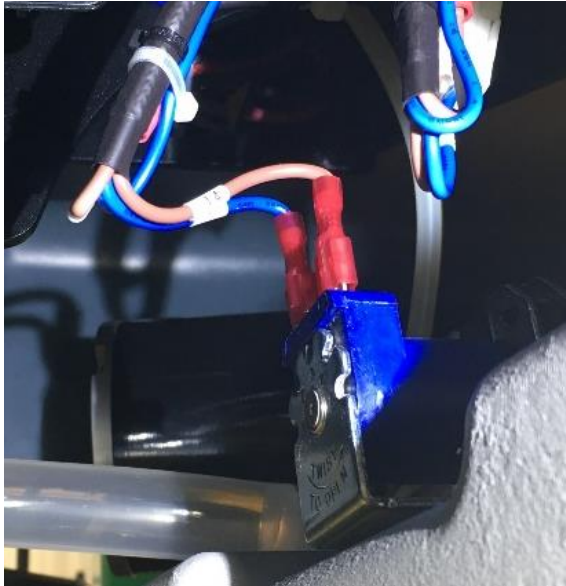

The wire(s) should **not** be broken, frayed, loose or disconnected from the Solenoid, as shown below.

