



DISTORTED TOUCHSCREEN TROUBLESHOOTING


- Check connection at the BCM and the touchscreen cable.
- Check for physical damage to the cable or touchscreen

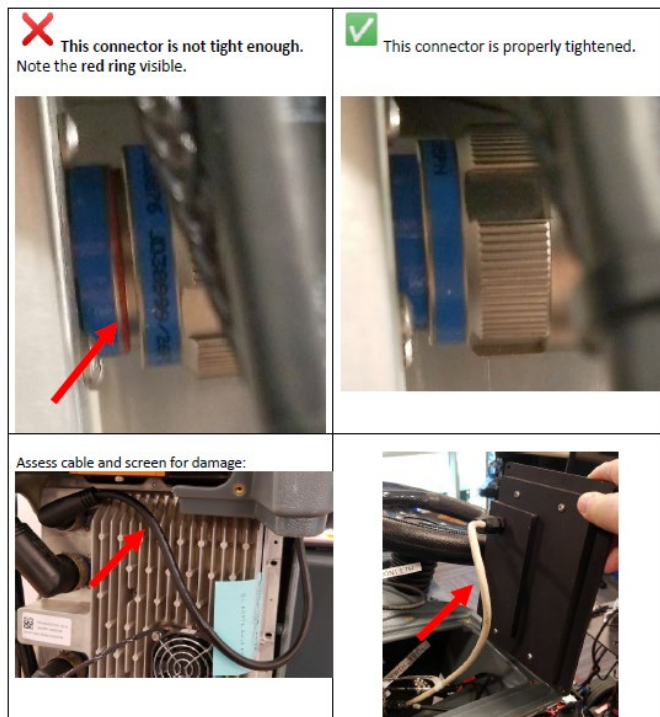

If the screen is distorted (shown below) check the touchscreen cable for presence of ferrites.

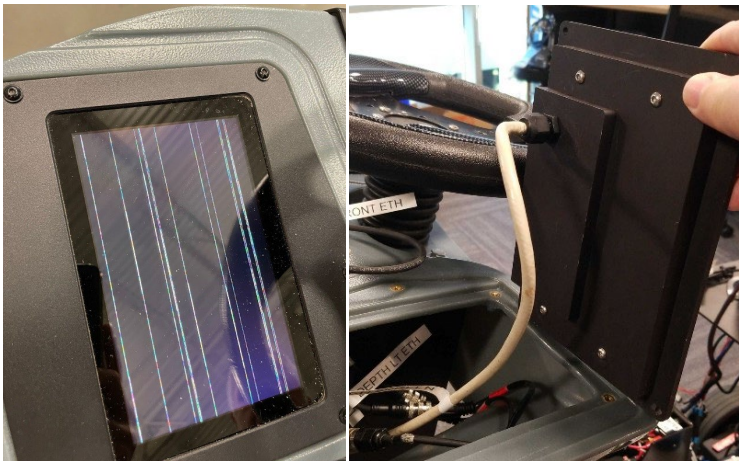

- If ferrites are present - Replace touchscreen
- If no ferrites are present - order 2 (part # 288-0166) and install (shown below)

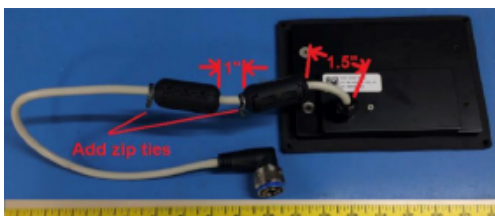

- Install 1 ferrite approximately 1.5" from the connector on the back of the touch screen
- Install 1 ferrite approximately 1.0" from the first ferrite
- Use zip ties to position each ferrite