


# DAILY MAINTENANCE

## 1. CLEANING THE RECOVERY TANK

- A. Raise the vacuum unit (1).
- B. Remove the drain hose (2) and empty the tank.
- C. Rinse the inside of the tank with water.
- D. Close the vacuum unit on the machine and replace the drain hose cap and drain hose.



**WARNING:** Always wear gloves when doing this operation to protect yourself from contact with hazardous chemicals.

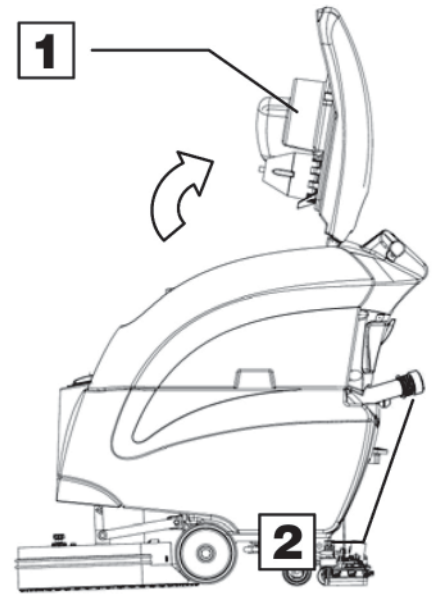


## 2. CLEANING THE VACUUM FILTER

- A. Raise the vacuum unit.
- B. Remove the vacuum filter cover by rotating it clockwise.
- C. Pull the filter straight down from the lid to remove it.
- D. Use water to clean the walls and base of the filter.
- E. Reassemble all the components.



**WARNING:** Always wear gloves when doing this operation to protect yourself from contact with hazardous chemicals.

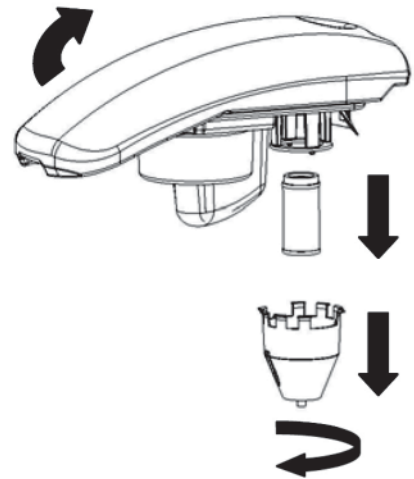


## 3. CLEANING THE VACUUM HOSE FILTER

- A. Raise the vacuum unit.
- B. Rotate the inner filter (1) and remove it.
- C. Use water to clean the walls and base of the filter.
- D. Reassemble all the components.



**WARNING:** Always wear gloves when doing this operation to protect yourself from contact with hazardous chemicals.

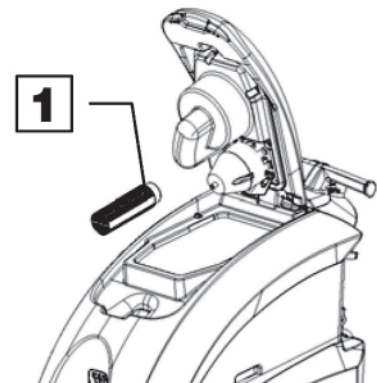


# DAILY MAINTENANCE

## 4. CLEANING THE SQUEEGEE

Ensure the squeegee is always clean, to improve drying results.

To clean:

- A. Remove the squeegee vacuum hose from the squeegee shoe adapter.
- B. Remove the cotter pins that attach the pins of the squeegee shoe.
- C. Disassemble the squeegee from its support.
- D. Loosen the wing nuts (1).
- E. Remove the squeegee band clamp and squeegee blade.
- F. Replace the squeegee blades.

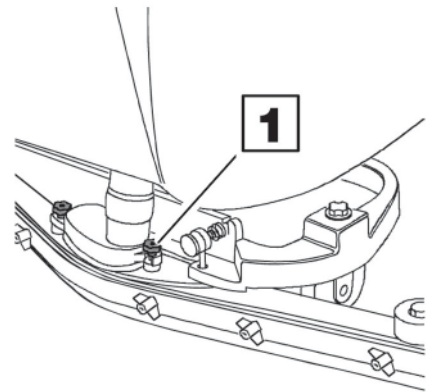


To reassemble the squeegee, repeat the operations in the reverse order.



**WARNING:** Always wear gloves when doing this operation to protect yourself from contact with hazardous chemicals.

## 5. REMOVING THE PAD DRIVERS

- A. Turn the key to the “off” position.
- B. Raise the brush deck using the foot lever.
- C. Rotate the brush until it comes out of the clutch as shown in the figure. The figure shows the rotation direction to release the right-hand brush; for the left-hand one, rotate in the opposite direction.

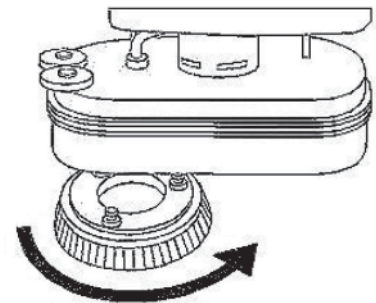


**WARNING:** Always wear gloves when doing this operation to protect yourself from contact with hazardous chemicals.

## 6. REPLACING THE SQUEEGEE BLADES

Check the state of wear of the squeegee blades and, if necessary, replace them.

To replace:

- A. Remove the squeegee hose from the squeegee shoe adapter.
- B. Push the release lever and release the right hand stud.
- C. Remove the squeegee vacuum from the squeegee yoke.
- D. Loosen the wing nuts.
- E. Remove the squeegee band clamp and squeegee blade.
- F. Replace the squeegee blades.

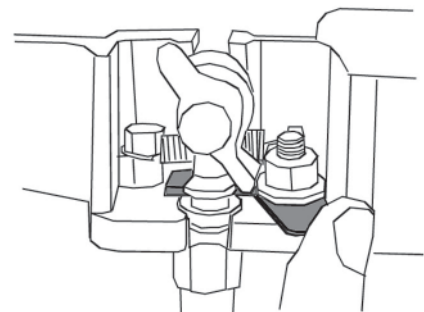

To reassemble the squeegee, repeat the operations in the reverse order.



**WARNING:** Always wear gloves when doing this operation to protect yourself from contact with hazardous chemicals.

# WEEKLY MAINTENANCE


## 1. CLEANING THE SQUEEGEE HOSE

Every week, or whenever vacuum seems to be unsatisfactory, check the squeegee hose for obstructions. To clean:

- Remove the hose from the squeegee shoe adapter on the squeegee shoe.
- Remove the other end from the recovery tank.
- Wash the inside of the hose with water from the end of the hose which is connected to the recovery tank.
- Reassemble the hose.




**WARNING:** Always wear gloves when doing this operation to protect yourself from contact with hazardous chemicals.

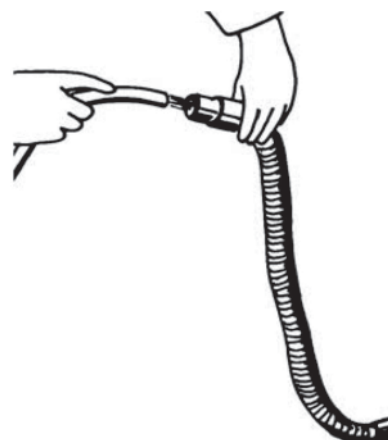

## 2. CHECKING THE BRAKE

Every week, check the distance between the brake pads and the wheels. If necessary, adjust them, so the pads are 0.12 inches away from the transport wheels at a distance of 0.12 in (3 mm) when released.

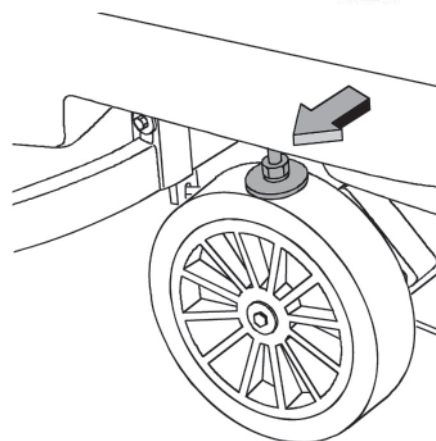

## 3. CLEANING THE SOLUTION TANK

- Loosen the solution tank cap.
- Rinse with water.
- Loosen the drain cap (1) located on the filter, and empty the tank.



**WARNING:** Always wear gloves when doing this operation to protect yourself from contact with hazardous chemicals.

