

Safety Rules:

- 1 Read the handbook completely before attempting to operate the unit.
- 2 Check the wall outlet to ensure for proper grounding of the electrical cable. Have a licensed electrician check the outlet if you are not sure.
- 3 Don't allow the cleaner to be used as a toy, or to run unattended at any time.
- 4 Don't use accessories except as recommended and provided by Shop-Vac.
- 5 Don't use the cleaner if the cord, plug, motor, filter, or the cleaner itself is in poor condition. Have a qualified serviceman inspect and replace parts whenever necessary.
- 6 Do not pick up flammable or readily combustible material, hot ashes, coals or use in the presence of explosive liquids or vapor.
- 7 Don't use your cleaner as a sprayer of flammable liquids such as oil-base paints, lacquers, household cleaners, etc.
- 8 Don't use cleaner in an enclosed space where flammable, explosive or toxic vapors are given off by oil-base paint, paint thinner, gasoline, some mothproofing substances, etc., or in an area where flammable dust is present.
- 9 Don't pick up burning cigarettes or other smoking materials.
- 10 Don't leave the cord lying on the floor once you have finished the cleaning job. It can become a tripping hazard.
- 11 Don't change bags or clean the unit until the plug has been removed (pulled out or disconnected) from the wall receptacle.
- 12 Don't abuse cord. Never carry tool by cord or yank it to disconnect from receptacle. Keep cord from heat, oil and sharp edges. Don't close doors on the cord or snag it under furniture or doors with sharp edges.
- 13 Extension Cord — When using the tool at a distance where an extension cord becomes necessary, a 3-conductor, grounding cord of adequate size must be used for safety, and to prevent loss of power and overheating. Use the table below to determine A.W.G. Wire size required.

Extension Cord Length in feet	25	50	75	100
A.W.G. Wire size required: 120V	18	16	14	12

Before using tool cord or extension cord, inspect them for loose or exposed wires and damaged insulation. Make any needed repairs or replacements before using your power tool. Use only three wire extension cords which have three-prong grounding-type plugs and three-pole receptacles which accept the tools plug. Replace or repair damaged cords. If using an extension cord when vacuuming liquid, be sure the connection does not come in contact with the liquid.


WARNING — TO AVOID ELECTRIC SHOCK DO NOT EXPOSE TO RAIN — STORE INDOORS.

Grounding Instructions

To protect the operator from electrical shock, this cleaner is equipped with an approved three conductor cord and grounding type plug. This plug is to be used only with the proper grounding type receptacle.

Your cleaner has a plug that looks like that shown in sketch (A).

An adapter, see sketch (B) and (C), is available for connecting three-prong type plugs to two-prong receptacles. The green-colored rigid lug extending from the adapter must be connected to a permanent ground such as a properly grounded outlet box.

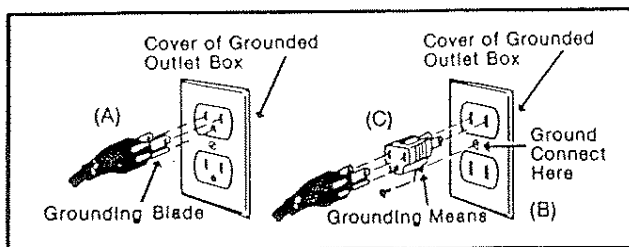

Features


The Shop-Vac Motor is mounted above the tank so that it is kept clear of dust, debris and water that accumulate on the bottom of the tank.

A Filter Assembly mounted under the motor unit prevents fine dust from clogging the motor and escaping through the exhaust (1).

Automatic shut-off for wet pick-up is provided by a float type valve that automatically shuts off suction when liquid in tank reaches capacity level.

The wet/dry nozzle will do most of the floor chores encountered (2). The squeegee insert is for wet pick-up applications.

The Shop-Vac also serves as a Blower to blow out debris from behind radiators or to clear outside walks from grass clippings or leaves. This can be done by simply inserting the hose into the exhaust port (3).

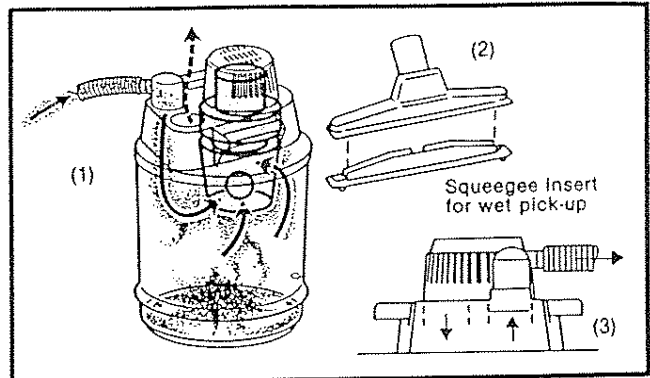

Unpacking and Set Up

- 1 Take off tank cover and remove any accessories which have been shipped in the tank. Install the paper filter (referring to the illustration under "Dry Pick-Up Operation").
- 2 Attach plastic snap-on dolly following detailed instructions.
- 3 Replace tank cover, and apply pressure with thumb to each latch until it snaps tightly in place over raised area on the tank cover where it says "CLAMP". Make sure all three lid latches are clamped securely.
- 4 Slip cleaner end of 1 1/4" flexible hose into the intake port.
- 5 Attach the 1 1/4" diameter extension wands to the accessory end of the hose. Twist slightly to tighten connection.
- 6 Attach the wet/dry nozzle to the extension wands. Twist slightly to tighten connection.
- 7 Plug the cord into the wall outlet. Your cleaner is ready for use.

Some models provide a 2 1/2" hose system. If available, it can be used when larger debris is encountered. To use the 2 1/2" accessories, insert the 2 1/2" hose directly into the intake port. Trying the various accessories, you will quickly find the right combination to fit your particular cleaning needs.

