



COMMANDER 27

27-Inch Propane Burnisher



For the ultimate in high-gloss shine, the Commander 27 Propane Burnisher is the perfect machine. This rugged buffer is built with the safest engine and emission control system available today. In fact, the Commander 27 is designed with the most up-to-date technology in the industry.

Built with the rugged 17-HP Kawasaki engine on a cast aluminum frame, the Commander 27 is wide enough to buff 40,000 square feet per hour. A full tank of propane will last more than three and a half hours, keeping the Commander 27 on the job longer than most propane buffers.

The Commander 27 comes standard with the NSS Vac-Trac™ Dust Collection System, which eliminates the powdered residue caused by burnishing old floor finishes.

A Low Oil Pressure Switch and Emission Warning Shutdown System are two safety features on this machine.

The Commander 27 meets EPA and California emission regulations.

NSS Enterprises, Inc.
3115 Frenchmens Road
Toledo, Ohio 43607-2958
USA




FM 40553

COMMANDER 27 Specifications

PAD SPEED	1600 RPM	CLUTCH	Deadman-operated electric clutch	DIMENSIONS	
PAD DRIVER	Flexible polypropylene	STARTER	12V. electric	Length	66 in. (168 cm)
PAD SIZE	27 in. (69 cm)	THROTTLE CONTROL	Independent, with independent choke control	Width	29 in. (74 cm)
ENGINE Type	Kawasaki	CONSTRUCTION	Cast aluminum	Height	32 in. (81 cm)
HP	Twin cylinder	DRIVE SYSTEM	V-Belt with dual bearings	WEIGHT	
Size	Nominal 17 HP 494 cm ³ (30.1 in. ³)	WHEELS	2 rubber 6 in. (15.2 cm) 2 dolly wheels 2 in. (5 cm)	Machine w/ tank	265 lbs. (120 kg)
FUEL SYSTEM	Propane 20 lb. tank LP vapor withdrawal	SOUND LEVEL	85 dbA	SHIPPING WEIGHT	
BATTERY	32 amp hour 12V. lead-acid	HANDLE	Adjustable height by wrench	Machine w/ tank	365 lbs. (166 kg)
				WARRANTY	
				Engine	3 year limited 1 year limited

The NSS Vac-Trac™ Dust Collection System controls powdering which can occur when burnishing older style floor finish formulations. Powder is removed through the natural air movement caused by the rapidly spinning pad. The vacuum system captures the powder and collects it in a filter bag located on the left side of the machine. This feature aids IAQ, and eliminates the “snowy” residue often left behind by other burnishers.

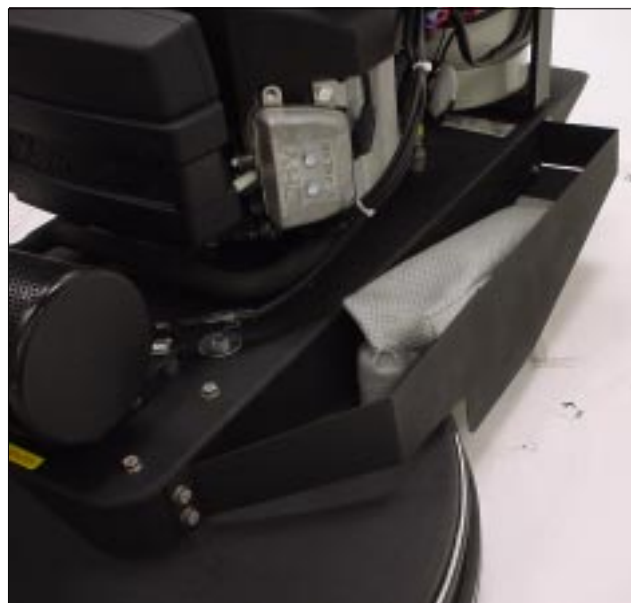

NSS® Enterprises, Inc.
 3115 Frenchmens Road
 Toledo, Ohio 43607-2958 USA
 419/531-2121 Fax 419/531-3761
www.nss.com
mailus@nss.com
 Specifications and appearance
 subject to change without notice.

DISTRIBUTED BY