


TASKI® swingo® 1655 & 1855


Flooded Wet Cell/Off Board Charger

Preparation

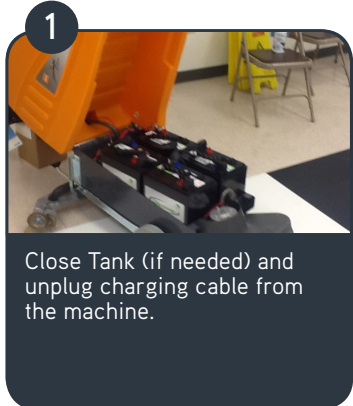


1

Close Tank (if needed) and unplug charging cable from the machine.

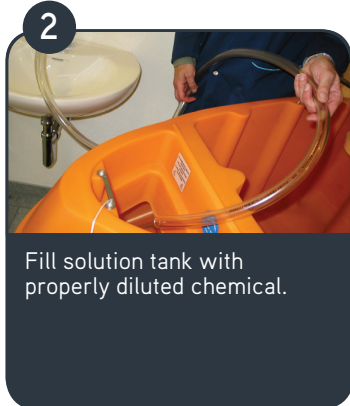


2

Fill solution tank with properly diluted chemical.

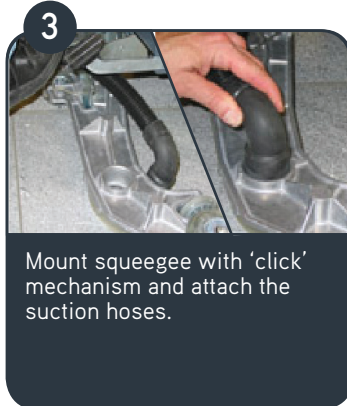


3

Mount squeegee with 'click' mechanism and attach the suction hoses.

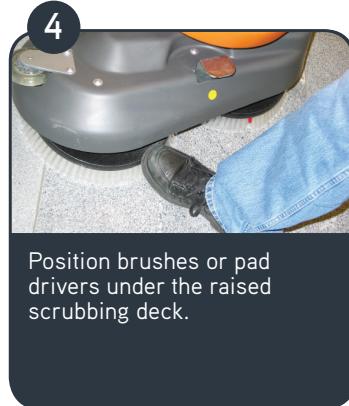

4

Position brushes or pad drivers under the raised scrubbing deck.

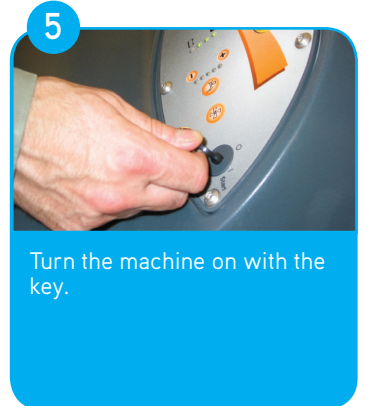

5


Turn the machine on with the key.

Operation



6

Lower the brush unit. The brushes should then connect automatically. If not repeat from step 3.

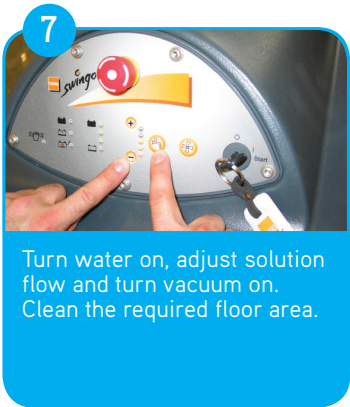

7


Turn water on, adjust solution flow and turn vacuum on. Clean the required floor area.



8


Clean the floor. When re-filling the tank and after use always switch off the machine with the key switch.

Maintenance

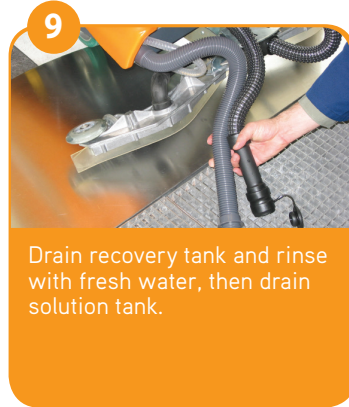


9

Drain recovery tank and rinse with fresh water, then drain solution tank.

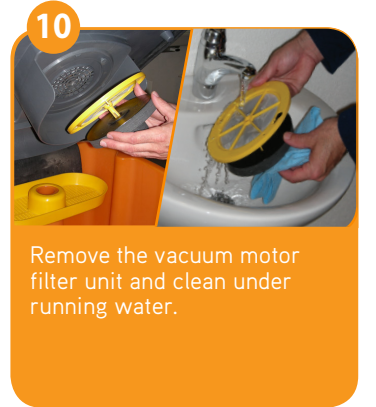


10

Remove the vacuum motor filter unit and clean under running water.

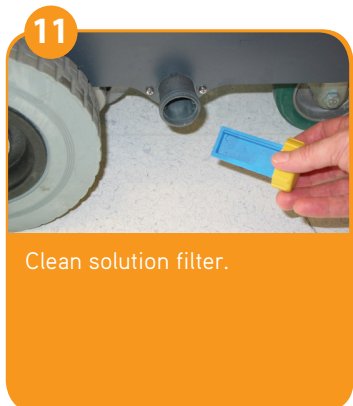

11

Clean solution filter.

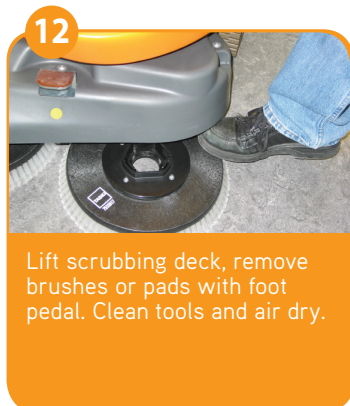


12

Lift scrubbing deck, remove brushes or pads with foot pedal. Clean tools and air dry.




13

Remove, clean squeegee and air dry. Store the squeegee on the hook on the side of machine.

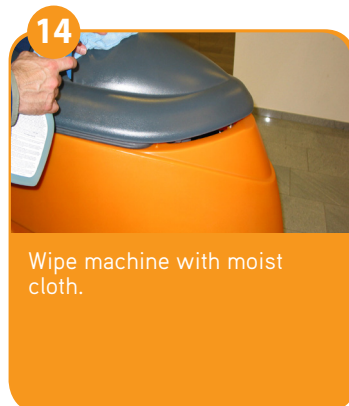


14

Wipe machine with moist cloth.

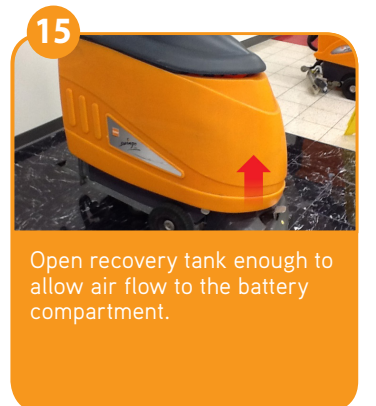

15

Open recovery tank enough to allow air flow to the battery compartment.

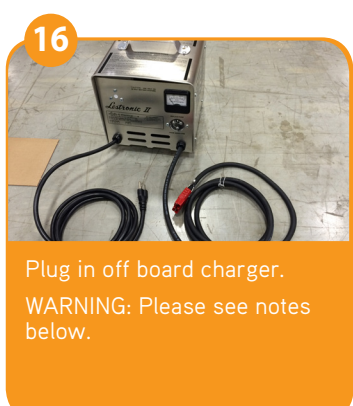

16

Plug in off board charger.
WARNING: Please see notes below.




17

Weekly: Check the battery water levels after a charging cycle has been completed. Add distilled water as needed.



18

Weekly: Ensure battery connections are tight.

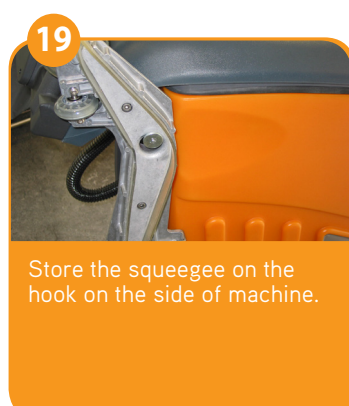

19

Store the squeegee on the hook on the side of machine.



20

Flip dosing aid to allow for venting.



21

Store machine with partially open lid (lid rests on dosing aid) for ventilation.

WARNING: Please follow the listed guidelines:

- Remove all jewelry before servicing batteries
- Keep sparks, flame, and smoking materials away from batteries
- Wear Protective safety gear while servicing batteries – gloves / safety glasses
- Ensure all connections are very tight
- Ensure all caps are attached on batteries
- Charge batteries in well ventilated area
- Never lay anything on top of batteries



ATTENTION! Do not use the machine before you have read and understood the Instructions of use