


56344215 CONTROL BOARD KIT

ES4000 Models: ALL

CONTENTS OF KIT

ITEM	PART NO.	QTY	DESCRIPTION
[]	56090105	1	Instruction Sheet
1	56384470	1	Interface Panel Assembly

[] = Not Shown

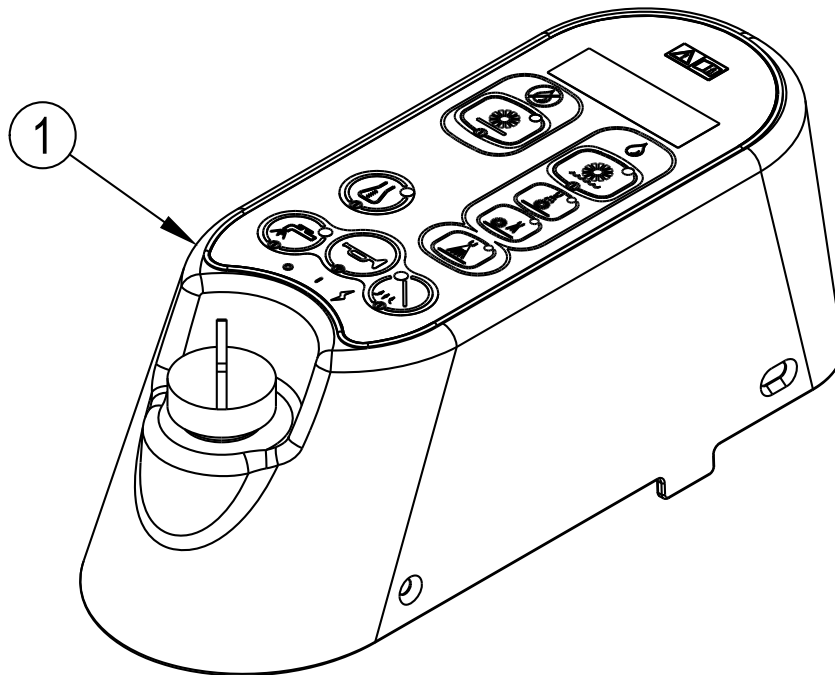

INSTALLATION INSTRUCTIONS

WARNING!

DISCONNECT BATTERIES BEFORE SERVICING.

DISCHARGE STATIC ELECTRICITY PRIOR TO HANDLING CONTROL PANEL ASSEMBLY.

Note: Refer to page 2 for installation instructions.

CONTROL PANEL REMOVAL AND INSTALLATION

- 1 **See Figure 1.** Flip seat forward and prop open. Remove (4) Screws **(A)** from Control Panel Assembly **(B)** then lift and tilt Control Panel Assembly **(B)** to access underside.
- 2 Take note of wiring connections for reassembly and then disconnect all wiring.
- 3 **DO NOT** pull pressure sensing tube **(C)** off PCB circuit board. Cut pressure sensing tube **(C)** (near PCB assembly) to disconnect it from PCB board. Discard old control board assembly.
- 4 Follow all previous steps in reverse order to reassemble and install the control panel assembly using the new Interface Panel Assembly **(1)** from the Control Board Kit.
- 5 **NOTE:** If there is water in the solution tank when the hose was disconnected, you will also need to drain the tank completely after re-installing the hose in order for the solution tank level indicator to read correctly on the display.

FIGURE 1

