

®

Encore® 20 Series Compact Scrubber



www.clarkeus.com

Clarke®

Cleaning Power Since 1916.

Compact Automatic Floor Scrubbers for Heavy Duty Cleaning Applications

Designed To Last ...


Encore compact autoscrubbers can be found cleaning hospitals, schools and even a variety of heavy industrial applications. This versatile unit is rugged and dependable, even in the harshest of conditions. After many years of use the Encore standard and luxury models still provide the greatest value in the industry.

Encore® Features Include:

- Heavy-duty Polydur® construction protects internal components.
- Reinforced floating scrub deck.
- Transaxle drive is standard on the luxury model for scrubbing inclines and ramps and offers a tremendous advantage when transporting the machine.
- Patented Accu-Track™ break-away squeegee prevents damage if accidentally hooked by a post or pallet. The connecting hose stays with the machine.
- Heavy duty rear caster absorb shocks from grouted or damaged floor surfaces.
- Optional brushes will increase cleaning effectiveness on rough concrete covered with grease and grime.
- Optional off-aisle spray tool and vac wand.
- Various battery pack options mean you only pay for the run time you need.



Service is a Breeze with Encore® Automatic Scrubbers

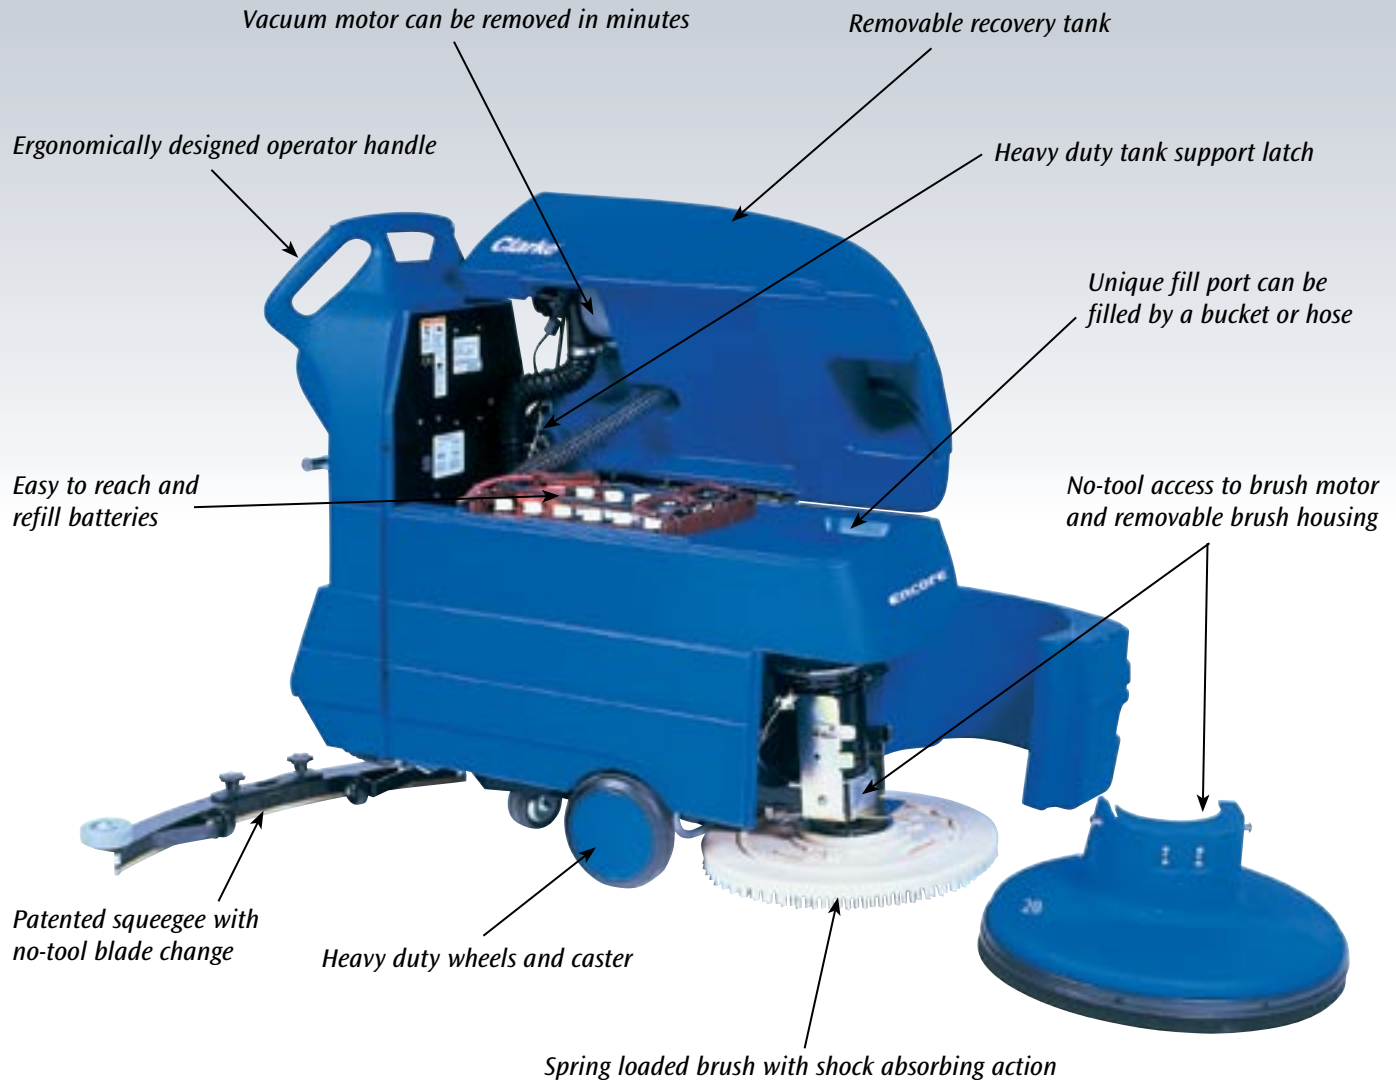

Operator controls feature electronic, infinitely variable, solution control that eliminates cables and linkages. Brush lift and squeegee lift handles are within easy reach. Circuit breakers, charger plug, and drain hoses are conveniently located.



Patented squeegee and footprint design provides perfectly dried floors even in the tightest of turns.

ENCORE® 20 Series

Compact Automatic Walk-Behind Scrubbers

Clarke®



KEY FEATURES

- Operator comfort
- Stylish design
- Extended run times
- Large capacities for a compact scrubber
- Impressive warranties

SPECIFICATIONS

	Encore S20	Encore L20
Part Number	Multiple part numbers, see price book	
Power Supply	24 Volt (2) 12 Volt, 95 AH or 195 AH	
Charger	115V 60 Hz or 230 V 50 Hz	
Vacuum Motor	3-stage tangential discharge	.75 hp (.56 kW)
Brush Motor	Permanent magnet, .75 hp (.56 kW)	
Traction Motor	Permanent magnet, .75 hp (.56 kW)	
Cleaning Swath	20" (50.8 cm)	
Brush Pressure	Floating Pressure = 55 lbs. (25 kg) / Locked down = 105 lbs. (48 kg)	
Brush Size/Speed	20" / 200 RPM	
Traverse Speed	Forward brush assisted / reverse not applicable for S20	
Forward/Reverse	Variable forward to 250 ft. (76 M) per minute and reverse to 190 ft. (58 M) per minute for L20	
Recovery/Solution Tank	14 / 14 gallons (53.2 / 53.2 L)	
Squeegee Size/Type	25" (69 cm), Accu-Trac™ with breakaway feature	
Drive Wheels/Caster	(2) 8" x 2" (20.3 cm x 5.1 cm) neoprene and (1) 4" x 1" (10.1 cm x 2.5 cm) swivel rear caster	
Dimensions	52.5" x 22.25" x 43.5" (133.4 x 56.5 x 100.5 cm)	
Weight	468 lbs. (212.3 kg) w/batteries	
Shipping Weight	607 lbs. (275.3 kg) w/batteries	

WHO USES THIS MACHINE?

- Cleaning contractors, in-house cleaning crews
- Schools
- Hospitals
- Government buildings
- Retail facilities

WHAT DOES IT DO BEST?

- Ideal for scrubbing in confined areas
- Reduces costs of hard floor cleaning

WHAT MAKES IT EASY TO USE?

- Ergonomically designed operator controls
- Highly maneuverable with excellent line-of-sight

WHAT ENHANCES ITS PRODUCTIVITY?

- Large solution and recovery tanks
- Adjustable brush pressure

WHAT ADDS TO ITS DURABILITY?

- Polydur® means strength (all poly parts)
- Long vacuum life
- Unmatched warranty

WHAT ARE THE SAFETY FEATURES?

- Recovery float shut-off prevents recovery tank overflow
- Key switch prevents unauthorized use

WHAT ARE THE OPTIONAL FEATURES?

- Parking brake
- Off-aisle wand, hoses and floor tools
- Maintenance-free 105 AH batteries
- ESP (recycling feature)
- Various brushes and floor pads

Clarke®

2100 Hwy. 265
Springdale, AR 72764
www.clarkeus.com

DISTRIBUTED BY:

Customer Relations: 1-800-253-0367
Fax Orders to: 1-800-825-2753
Technical Service: 1-800-356-7274

©2005 ALTO U.S. Inc., All Rights Reserved. Specifications subject to change without notice. P/N 70328A Rev. 04/06

